

NEW!

BREAKAWAY SERIES

BREAKAWAY SERIES

Actual size

Colder's new BreakAway™ coupling provides safe and easy fluid transfer and protection from costly product loss and equipment damage. These high quality, leak-free connectors are designed to disconnect when pull force is applied without depressing a latching mechanism, allowing users to make a clean, fast and easy break at critical moments.

Features

- Reliable break away design
- Automatic dual shutoff valves
- Streamlined, flush finish

Benefits

- Rapid, automatic disconnection
- Safe and clean fluid handling
- Easy-to-use for maximum productivity

Specifications

Pressure: 0 to 20 psi, 1.4 bar

Temperature: 0° F to 150° F (-18° C to 66° C)

Materials:

Main components and valves: Acetal

Valve springs: 316 stainless steel

O-rings: Buna-N

Retention ring: PPS


Color: White or black

Tubing Sizes:


1/4" to 3/8" ID, 6.4mm to 9.5mm ID

WARNING: Pressure, temperature, chemicals, and operating environment can affect the performance of couplings. It is the customer's responsibility to test the suitability of Colder's products in their own application conditions.


BreakAway Disconnect Force

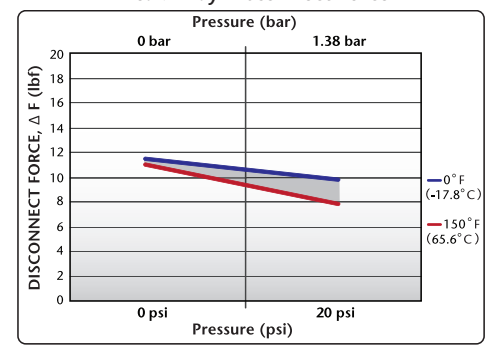

BreakAway Pressure Range

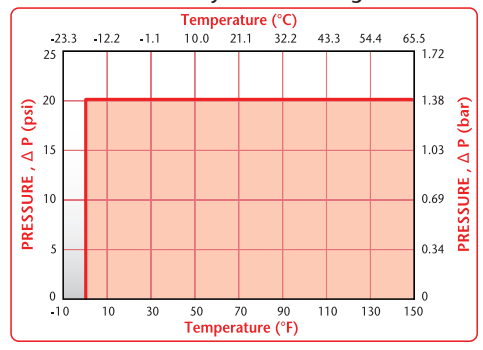


BreakAway Water Flow

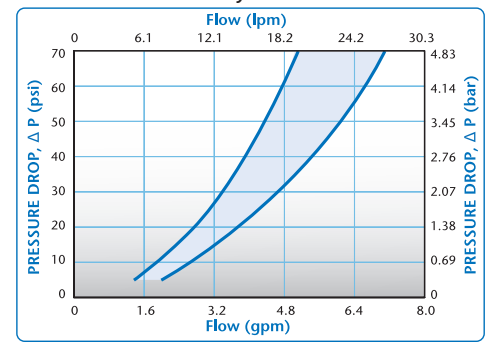


Visit us at www.colder.com
or call 651-645-0091
to get a free catalog CD or to
find your local distributor.

These graphs are intended to give you a general idea of the performance capabilities of each product line. The shaded area of the graphs represent the operating range of the product family, i.e., upper and lower values are shown. Therefore, depending on the exact coupling configurations selected, you can reasonably expect values to fall within the shaded area. Force to disconnect is approximately 11 pounds pull force at 0 psi line pressure and 8 pounds pull force at 20 psi. In some applications and with certain types of tubing, a hose clamp may be required.

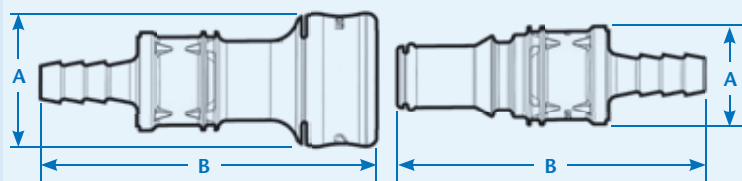

A = Height/Diameter
B = Total Length (including valve)



Product Dimensions

	PANEL OPENING	MAX. PANEL THICKNESS	MIN. PANEL THICKNESS
COUPLING BODIES	see drawing	.50	.02

Coupling Bodies

WHITE ACETAL

TERMINATION	TUBING SIZE	METRIC EQ.	SHUTOFF	A	B
IN-LINE	1/4" ID	6.4mm ID	BACD17004	0.92	2.29
HOSE BARB	3/8" ID	9.5mm ID	BACD17006	0.92	2.29
TERMINATION	TUBING SIZE	METRIC EQ.	SHUTOFF	A	B
PANEL MOUNT	1/4" ID	6.4mm ID	BACD16004	0.92	2.29
HOSE BARB	3/8" ID	9.5mm ID	BACD16006	0.92	2.29



BLACK ACETAL

TERMINATION	TUBING SIZE	METRIC EQ.	SHUTOFF	A	B
IN-LINE	1/4" ID	6.4mm ID	BACD17004MBLK	0.92	2.29
HOSE BARB	3/8" ID	9.5mm ID	BACD17006MBLK	0.92	2.29
TERMINATION	TUBING SIZE	METRIC EQ.	SHUTOFF	A	B
PANEL MOUNT	1/4" ID	6.4mm ID	BACD16004MBLK	0.92	2.29
HOSE BARB	3/8" ID	9.5mm ID	BACD16006MBLK	0.92	2.29



Coupling Inserts

WHITE ACETAL

TERMINATION	TUBING SIZE	METRIC EQ.	STRAIGHT THRU	SHUTOFF	A	B
IN-LINE	1/4" ID	6.4mm ID	BAC22004	BACD22004	0.58/0.69	1.58/2.10
HOSE BARB	3/8" ID	9.5mm ID		BACD22006	0.69	2.10



BLACK ACETAL

TERMINATION	TUBING SIZE	METRIC EQ.	STRAIGHT THRU	SHUTOFF	A	B
IN-LINE	1/4" ID	6.4mm ID	BAC22004MBLK	BACD22004MBLK	0.58/0.69	1.58/2.10
HOSE BARB	3/8" ID	9.5mm ID		BACD22006MBLK	0.69	2.10



MBLK = molded black material.



美国CPC (Colder Products Company)

快速接头联系方式：

西安嘉岳自动化技术有限公司 Garye Automation Company

地址：西安未央区未央大道138-1号中登大厦A座十二层

电话：029 - 8647 4991 传真：029 - 8647 3942

邮编：710016 手机：182 9256 1696

E-mail：sales@garye.cn

Web：http://www.garye.cn

WARRANTY: All sales are subject to Colder Products Company's limited express warranty set forth in the Colder catalog. Contact your local distributor or Colder Customer Service for warranty provisions.

Warning: Due to the wide variety of possible fluid media and operating conditions, unintended consequences may result from the use of this product, all of which are beyond the control of Colder. It is the user's responsibility to carefully determine and test for compatibility for use with their application. All such risks shall be assumed by the buyer.